

SOLAR LINE IMPEDANCE STABILIZATION NETWORK


SOLAR TYPE 21804-5-TS-500-N

Specifications:

Current rating: 500 amperes
Inductance: 5 μ H
Frequency range (recommended): 100 kHz – 500 MHz
Voltage (line to ground): 1200 VDC, 500 V 50 – 60 Hz, 500 V 400 Hz, 500 V 800 Hz
Power connections: TS 1/2-20 threaded stud
RF connector: Type N
Coupling capacitor: 0.10 μ F
Circuit: Single
Case size: 10.29" x 9.25" x 20.00" (26.14 cm x 23.50 cm x 50.80 cm)
Overall length with base plate: 23.75" (60.33 cm)

Remarks: CISPR 25 (2016). Specifications subject to change without notice.

Rev. 1.0 October 24, 2018

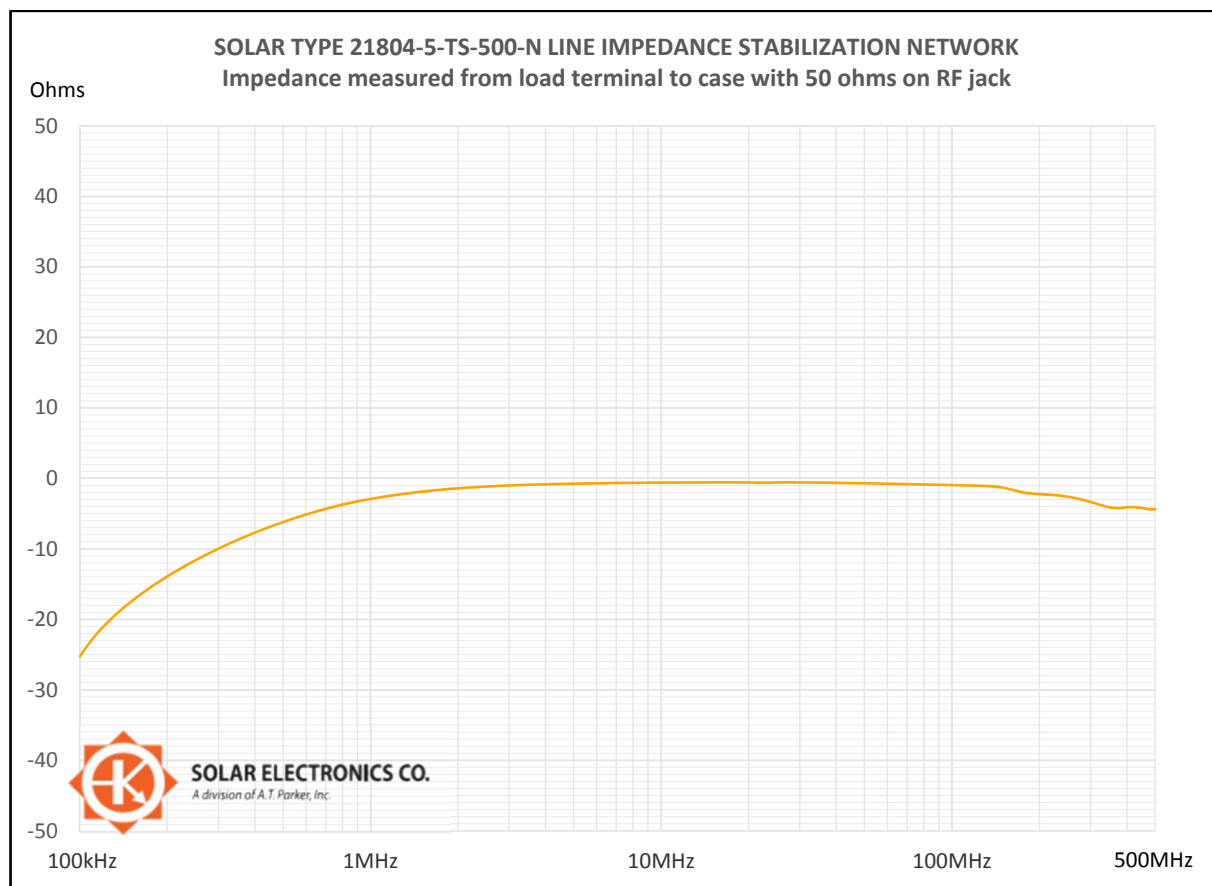

SOLAR ELECTRONICS COMPANY

A Division of A.T. Parker, Inc.
10866 Chandler Boulevard, North Hollywood, CA 91601

YiFengTech 亦锋科技

地址：北京市亦庄经济技术开发区宏达中路16号宏达三鼎工业区写字楼309室 电话：010 - 67886078 传真：010 - 67891690 邮箱：inquiry@yifengtech.com.cn